


**Product Details**

Code : SHROWL2230\_2\*15W (30w) COB Cylinder Two-way\_IP67  
 Model : Facade Light  
 Make : SHINE PLUS

**Electrical Data**

Power Consumption : 30W +/- 5% Tolerance  
 Operating Voltage Range : 140VAC-265VAC  
 Frequency : 50 Hz  
 Power Factor : > 0.95  
 THD : < 10%  
 Driver : Constant Current  
 Efficiency : > 85%

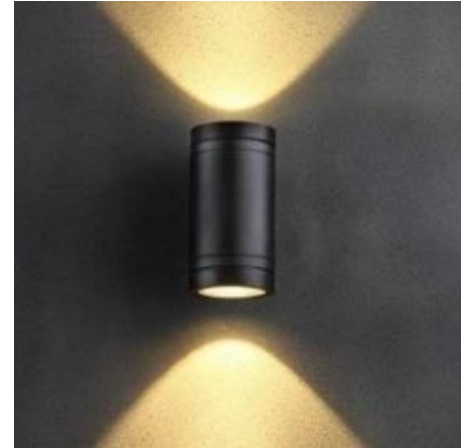

**Light Data**

Light source : LED OSRAM COB 30W  
 Efficacy : 120lm/Watt  
 Luminous Flux : 3600Lm  
 Beam Angle : 40 degree  
 Colour temperature: 3500K/4500K/6500K  
 CRI : 80  
 Average Life : L70 @40,000 Hours.

**Environmental**

Working Temperature: 0 °C to + 55 °C  
 Working Humidity : 10 to 90% RH  
 Storage Temperature: 0°C TO + 85 °C  
 IP Rating : IP67 (Protected from total dust and High Pressure water jets from any direction)

**Protection**

Input Overvoltage/Under voltage: Protected >320VAC with 5-10V hysteresis  
 High voltage standing : Protected (440VAC)  
 Output Short circuit : Protected  
 Voltage Power Fluctuations/Surge: 2.5KV Protected

**Physical Details**

Material : Die-Casting Aluminium  
 Dimensions (L X W X H): 170X100X160 MM  
 Weight (Gross) : 1.2 Kg  
 Suitable Fixing : Surface/Outdoor

**Applications** : Indoor/Outdoor

**Application Area** : Façade Lighting  
 Surface Lighting  
 Tree Lighting

**Warranty** : 2 Years

[www.shineplusled.com](http://www.shineplusled.com)

